



i4850 and i3550 wireless scenario

In this scenario i4850 router and i3550 access point work connected with a Wi-Fi link.


- 1 Turn on the i3550. Wait until LED blinks yellow.

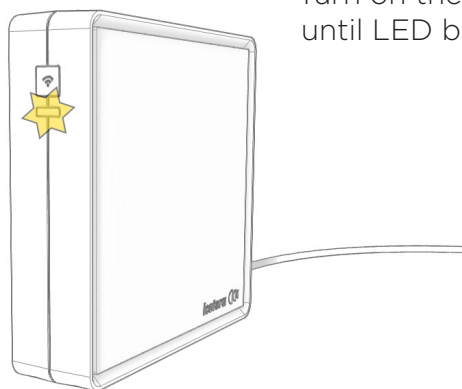

- 2 Connect i3550 and i4850 with an Ethernet cable.

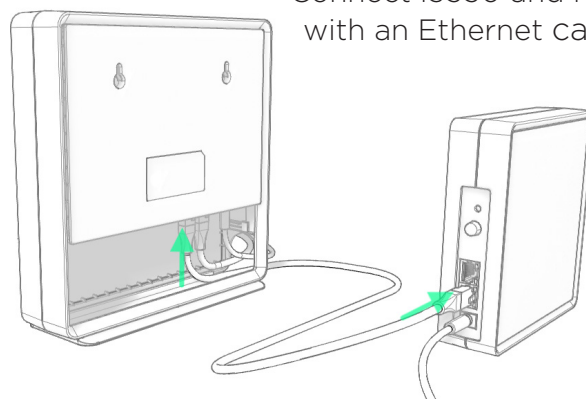


- 3 Wait until LED turns solid blue or white* and then goes off.

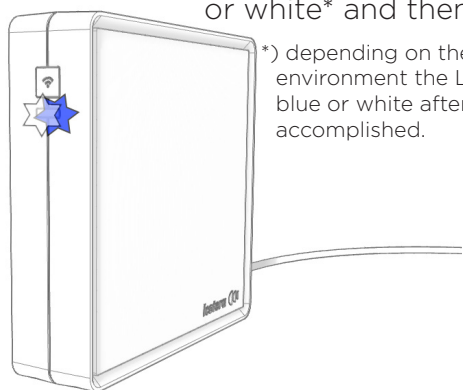


*) depending on the network environment the LED can turn blue or white after the pairing is accomplished.

- 4 Disconnect the Ethernet cable from both i4850 and i3550.

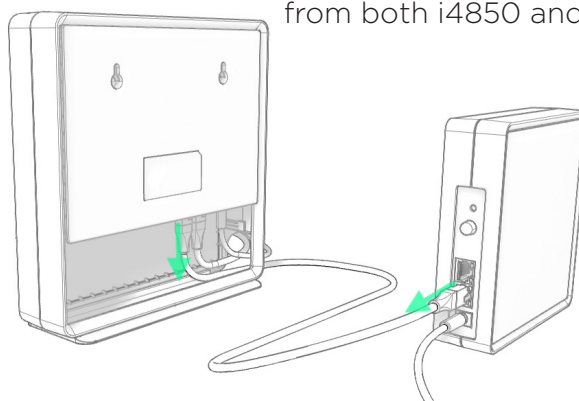

- 5 Place both devices in spots that will guarantee the optimal Wi-Fi coverage of your premises.

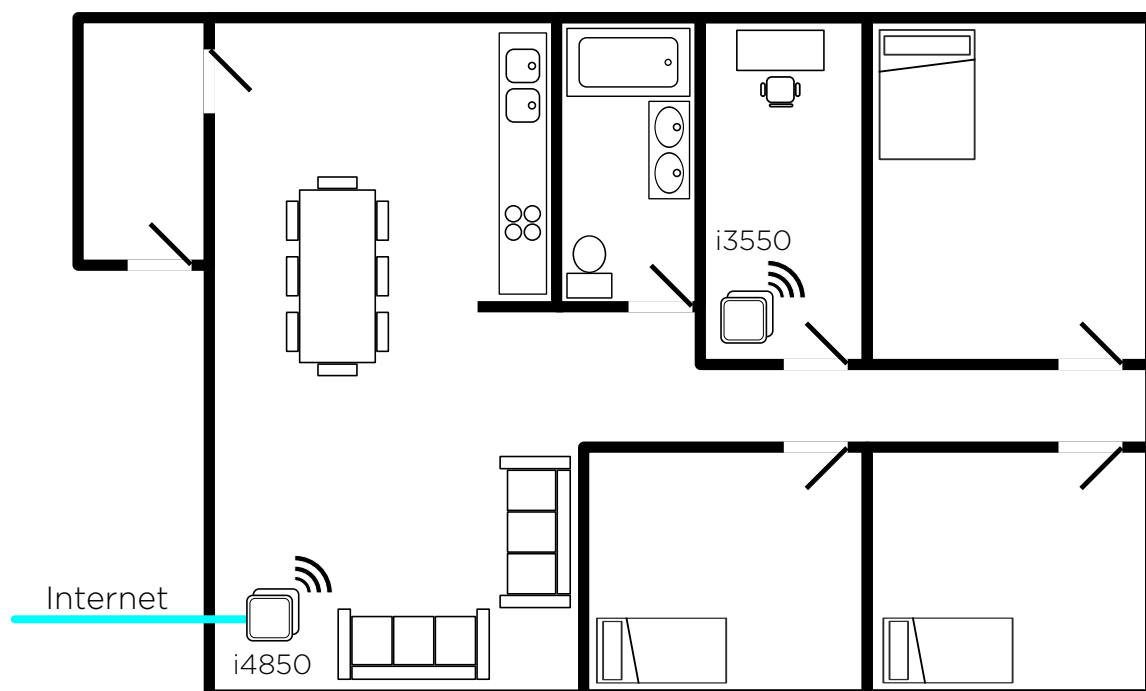

5a In case of a two-storey house placing the i3550 directly above the i4850 will ensure the best Wi-Fi link between both devices.

